


PRATT

Henry Pratt Company

HP Series High Performance Double Offset Butterfly Valve

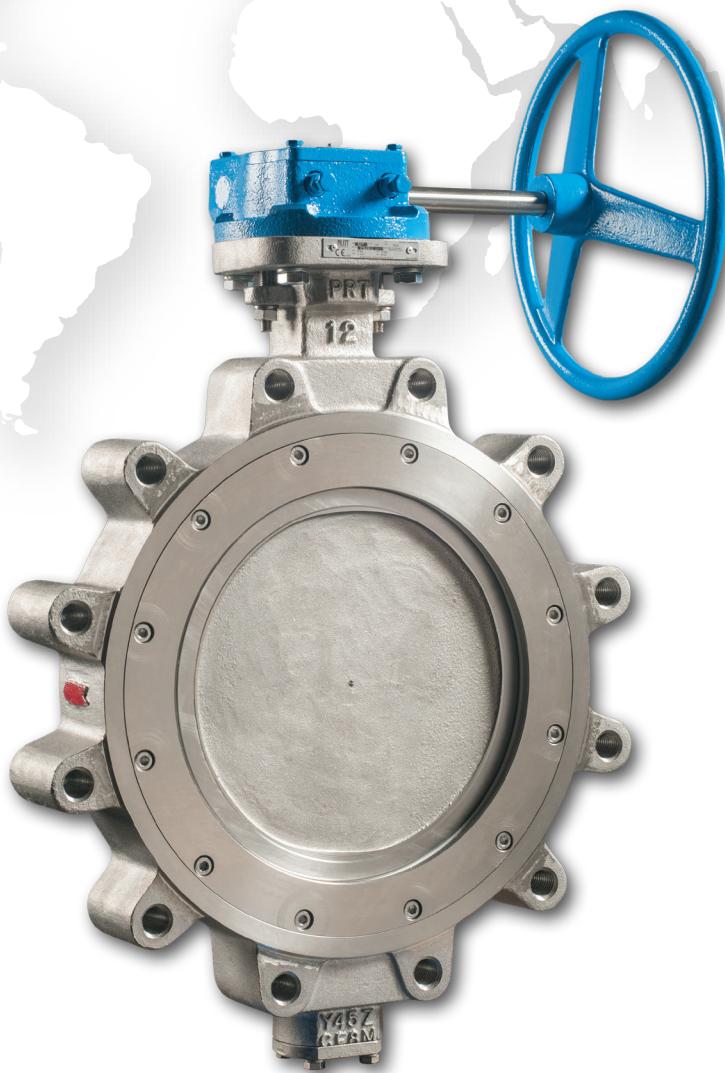

**Engineering Creative Solutions
for Fluid Systems Since 1901**

A Tradition of Excellence

With the development of the first rubber seated butterfly valve more than 70 years ago, the Henry Pratt Company became a trusted name in the flow control industry, setting the standard for product quality and customer service. Today Pratt provides the following range of superior products to the water, wastewater and power generation industries.

Butterfly Valves: from 3" to 162"

Rectangular Valves: 1' x 1' to 14' x 16'

Ball Valves –

Rubber Seated: from 4" to 60"

Metal Seated: from 6" to 48"

Plug Valves: from 1/2" to 72", 100% port available up to 48", 3 ways

Air Valves for Water and Wastewater: from 1/2" to 20"

Hydraulic Control Systems

Valve Controls

**Energy Dissipating Valves
and Fixed Energy Dissipaters**

Cone Valves

Check Valves

Plunger Valves

A Commitment to Meeting The Customers' Needs

Henry Pratt valves represent a long-term commitment to both the customer and to a tradition of product excellence. This commitment is evident in the number of innovations we have brought to the industries we serve. In fact, the Henry Pratt Company was the first to introduce many of the flow control products in use today, including the first rubber seated butterfly valve, one of the first nuclear N-Stamp valves, and the bonded seat butterfly valve.

Innovative Products For Unique Applications

Though many of the standard valves we produce are used in water filtration and distribution applications, Pratt has built a reputation on the ability to develop specialized products that help customers to meet their individual operational challenges.

Creative Engineering for Fluid Systems

Pratt's ability to provide practical solutions to complex issues is demonstrated by the following case histories.

Earthquake Proof Valves

Pratt designed and manufactured hydraulically actuated valves for a water storage application so that the valves would automatically operate in the event of earthquakes. This led to the development of a valve that will withstand acceleration forces of up to 6gs.

Custom Actuation/Isolation Valves

Pratt has designed and manufactured nuclear quality quarter-turn valves and parts since the first nuclear-powered generating plants were built. Our custom valves are able to close in a millisecond, using specially designed Pratt electro-pneumatic actuators.

Valves Designed for Harsh Environments

Pratt designed and manufactured a 144" diameter butterfly valve for the emergency cooling system at a jet engine test facility. The valve was designed to supply water to help dissipate the tremendous heat generated by the engines during testing.



PRATT
Henry Pratt Company

**Through experience, commitment and creative engineering, Pratt is uniquely suited to provide superior products for our customers' special needs.
For more information, contact our corporate headquarters in Aurora, Illinois.**



401 South Highland Avenue
Aurora, Illinois 60506-5563
www.henrypratt.com
phone: 630.844.4000
fax: 630.844.4160

Table of Contents

HP Series High Performance Double Offset Butterfly Valves – 2" to 72"

Construction Specification.....	2
Features.....	2
Design Details.....	3
Suggested Specification	4
CV Flow Data	5
Dimensional Data - Wafer.....	6-7
Dimensional Data - Lug.....	8-9

Construction Specification: Pratt HP Series High Performance Double Offset Butterfly Valves



Valve with Lever Operator

Sizes: 2" through 72"

Body: WCB A-216 Carbon Steel,
CF8M A351 Stainless Steel

Disc: CF8M A351 Stainless Steel

Stem: 17-4 PH Stainless Steel

Seat: PTFE, RTFE, 316 SS, Inconel, Fire Safe, MTFE

Bearing Material: Graphite Reinforced Teflon, 316 SS

Packing Material: PTFE Cup & Cone, Graphite

Actuation Options: Worm Gear, Lever,
Pneumatic, Electric

Pressure Ratings: CL.150 - 2-72"; CL. 300 - 2"-48"
CL. 600 - 2"-24"

Note: Many alloys & seat materials are available to
accommodate virtually any service condition.



Valve with Gear Operator

Features:

- Double offset disc & shaft
- Blowout proof shaft design
- Bi-Directional (Soft Seat only)
- Dead End & Double Dead End Service
(Lug Type only)
- Fire Safe Certified (Metal seat and
Fire safe seat, API 607)
- Spherical Sealing Surface


Optional Features:

- Live loaded packing
- O2 Cleaning
- Steam jacket
- Bonnet extension
- Oil free cleaning
- Anti static
- Customized option designs are available upon request

Pratt HP Series High Performance Double Offset Butterfly Valve Design Details:

Butterfly Valve, sizes 2" through 72"

2"-72" ANSI 150, 2"-48" ANSI 300, 3"-24" ANSI 600

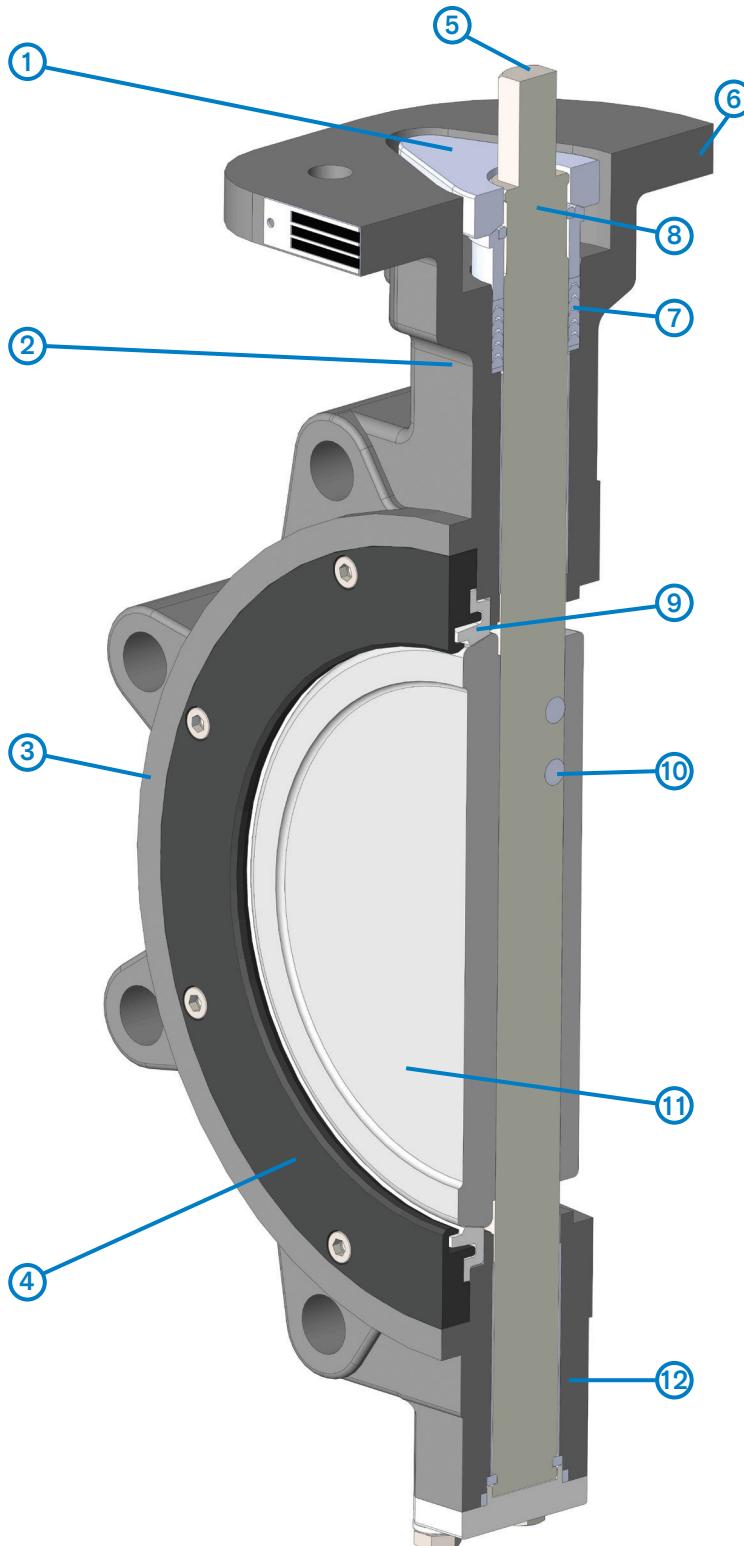

1. Below Bonnet Gland Packing: Our recessed gland packing eliminates the requirement for mounting kit and reduces overall package height. Our cup and cone design gland flange and packing compression guide allows an even compression of packing even if field adjustments are made incorrectly.

2. Extended Neck: Bonnet to flange clearance is a minimum of 2" allowing for piping insulation on all sizes of valves.

3. Body: Precision cast bodies in virtually any alloy allows customers to utilize proper materials for virtually any application. Castings conform to all applicable ASME codes. Certified independent testing can be performed when requested or required such as RT and PT. Bodies are available in Wafer, Lug, Double Flanges and Butt-weld.

4. Seat Retention Ring: Our highly engineered retainer plate assures customer of proper seat stability and allows for full rated bi-directional, dead end service. The HP series seat retention ring conforms to the latest revisions of API 609 accommodating spiral wound gasket sealing elements to fall outside the bolting area.

5. Shaft: Our hardened 17-4 one piece design provides shaft strength and integrity under the most severe conditions. Other shaft materials are available depending upon application.

6. Bonnet: Allows for direct mounting of all types of actuation. Standard drilling conforms to Kv industrial standards. ISO drilling is also available upon request.

7. Packing: Multi layered "cup and cone" PTFE packing allows for even compression against shaft and shaft journal area providing a positive seal even under high cycles. Multi layered graphite packing is available for metal seated and fire safe valves.

8. Blowout Proof Shaft Retention: Engineered to be one of the safest valves in the market our shaft retention system meets API requirements. Shaft retention system allows the gland flange and follower to slide up and down a machined recessed portion of the shaft. If a shaft were to shear our system prevents hydraulic force from projecting the shaft keeping it safely retained above the packing.

9. Seat: The HP series seat is machined to lock between the body and retention ring but is allowed to move under pressure. This allows us to utilize solid seats giving maximum disc edge coverage, high cycle life and very low torque without the requirement for rubber O-ring energizers or metal back up support.

10. Disc to Shaft pins: A tangential tapered hole is machined on the leading edge of the valve shaft and through the shaft journal of the disc placing the pins in a compression mode. Taper pins are spot welded in place after final assembly.

11. Disc: Disc is designed to have minimal deflection and movement under pressure which reduces torque and improves cycle life. The discs tapered edge and offset shaft journal generates a "camming" motion allowing for a release from the seat within the first few degrees of opening.

12. Bearings: Full length upper and lower bearing materials are constructed of 316 S.S. impregnated with either PTFE or Graphite depending on Service conditions.

Suggested Specifications: HP Series Wafer/Lug Butterfly Valve, Sizes 2" through 72"

General

Valves shall be of Wafer, Lug or Double Flanged design for installation between ANSI 150, 300 or 600 flanges. Design Standards: API 609, ANSI/ASME B16.34, soft seated and metal seated, and API 607 (Fire Safe Test)

Pressure Rating

ANSI 150 – 285 PSI

ANSI 300 – 740 PSI

ANSI 600 – 1440 PSI

Body

Standard valve body shall be 1 piece Carbon Steel (ASTM 216) or CF8M (ASTM A351) construction conforming to the following. Many other materials available upon request including high alloys.

API 609 Category B

MSS-SP-68 Table 1

ANSI/ASME B 16.10 Table 8

ISO 5752 Table 1 & BS 5155

ANSI/ASME B 16.5 Class 150, 300, 600

ANSI/ASME B 16.47 Series A Class 150, 300

MSS-SP-44 Class 150, 300, 600

Disc

Standard valve disc shall be CF8M (ASTM 351) with other materials available upon request. The angled sealing surface allows for quick release from seat which reduces torque and seat wear.

Integrally Cast Travel Position Stop

Designed to prevent over travel of disc and provides a set point when calibrating automation.

Blow Out Proof Shaft

Standard valve shaft shall be constructed of 17/4 PH Stainless Steel to provide maximum strength and stability for high torque applications. Other materials available upon request.

Seat

Valve seat shall be PTFE, RTFE or MTFE as standard offering. Seat design is free floating and pressure assisted to provide an interference and pressure assisted seal to achieve a positive seal under both low and high pressures in both directions. Fire Safe and metal seats are also available.

Seat Retainer Plate

Shall follow body material and shall conform to the latest revisions of API accommodating Spiral wound gaskets to seal with no special requirements. Bolting is located outside the sealing element.

Packing

Soft seated valve shall use Teflon "Cup and Cone" packing. Metal Seated and Fire Safe valves shall use Die-formed Graphite packing. Either arrangement shall be easily adjustable with no special tools required.

Gland Packing

Pratt's below bonnet gland packing allows for automation to direct mount with no brackets and couplers which can allow hysteresis on valve shaft. Pratt's overall package remains low profile reducing overall space requirements.

Bearings

Pratt utilizes a Stainless Steel/Teflon bearing material for soft seated valves and Stainless steel/graphite for Fire Safe and Metal seated valves. Both materials are superior in reducing friction and side thrust and are suitable for corrosive applications.

Testing

All valves are 100% tested per API 598 and documented. Standard Testing reports and MTR's can be supplied at any time at no charge. Customized testing can also be performed based on customer's requirements.

Additional materials are available. Contact Pratt or your local Pratt distributor for more information.

CV Flow Data: HP Series High Performance Double Offset BFV

During its product development phase, the HP Series Wafer/Lug Butterfly Valve was tested to ensure that it met our own rigorous standards for flow capacity. Throughout testing, the HP Series valve has consistently produced high Cv values which translates to lower flow resistance, and low system operating cost to the user over the life of the valve. The following Cv chart represents the flow characteristics for all sizes available.


Cv Value of High Performance Butterfly Valve Class 150										
SIZE		Degree of Opening								
inch	mm	10°	20°	30°	40°	50°	60°	70°	80°	90°
2	50	2	5	12	19	32	45	65	81	88
2.5	65	3	9	21	33	54	77	111	138	150
3	80	5	14	32	50	82	116	168	209	227
4	100	9	25	57	90	148	209	303	377	410
5	125	16	44	104	163	266	377	548	681	740
6	150	25	65	150	235	380	540	785	975	1060
8	200	55	130	305	480	785	1110	1615	2005	2200
10	250	85	205	475	750	1225	1735	2520	3135	3400
12	300	115	280	655	1025	1680	2380	3450	4290	4700
14	350	150	355	830	1305	2140	3030	4395	5465	5900
16	400	200	475	1115	1750	2860	4055	5880	7310	7900
18	450	265	630	1475	2315	3790	5365	7790	9680	10500
20	500	345	830	1935	3040	4975	7050	10230	12715	13800
22	550	375	975	2275	3580	5855	8295	12035	14960	16300
24	600	485	1265	2955	4640	7590	10755	15605	19405	21100
26	650	550	1450	3350	5300	8650	12250	17800	22100	24000
28	700	650	1750	4050	6350	10350	14650	21300	26450	28800
30	750	750	2000	4600	7250	11900	16850	24400	30350	33000
32	800	850	2350	5450	8600	14050	19900	28850	35850	39000
34	850	1000	2750	6450	10150	16650	23550	34200	42500	46200
36	900	1100	2950	6900	10900	17800	25200	36600	45500	49400
40	1000	1550	4000	9300	14650	23950	33900	49200	60500	66500
42	1050	1650	4350	10100	15900	26000	36850	53450	65000	72200
48	1200	2350	6100	14200	22350	36550	51800	75150	91450	101600

Cv Value of High Performance Butterfly Valve Class 300										
SIZE		Degree of Opening								
inch	mm	10°	20°	30°	40°	50°	60°	70°	80°	90°
2	50	2	5	12	19	32	45	65	81	88
2.5	65	3	9	21	33	54	77	111	138	150
3	80	5	14	32	50	82	116	168	209	227
4	100	9	25	57	90	148	209	303	377	410
5	125	16	44	104	163	266	377	548	681	740
6	150	24	60	139	218	357	506	735	914	995
8	200	45	110	260	410	670	945	1375	1710	1900
10	250	75	175	415	650	1065	1505	2185	2720	3000
12	300	105	250	580	910	1495	2115	3070	3815	4100
14	350	135	325	755	1185	1940	2750	3985	4955	5400
16	400	175	415	970	1520	2490	3525	5120	6365	6900
18	450	245	590	1375	2165	3540	5015	7275	9045	9800
20	500	315	760	1770	2780	4555	6450	9360	11635	12600
24	600	435	1135	2645	4155	6800	9635	13980	17380	18900
30	750	650	1750	4050	6400	10450	14800	21500	26700	29000
36	900	1000	2700	6300	9900	16200	22900	33250	41350	44900
40	1000	1450	3800	8900	13950	22850	32400	47000	57800	63500
42	1050	1500	3950	9250	14550	23850	33750	49000	59600	66200
48	1200	2100	5450	12750	20050	32850	46550	67500	82100	91200


Cv Value of High Performance Butterfly Valve Class 600										
SIZE		Degree of Opening								
inch	mm	10°	20°	30°	40°	50°	60°	70°	80°	90°
3	80	3	9	21	33	54	77	112	139	151
4	100	5	15	34	53	87	124	180	224	243
6	150	15	38	88	139	228	322	468	581	630
8	200	30	70	160	250	410	580	845	1050	1100
10	250	50	120	285	450	735	1040	1510	1875	2000
12	300	70	165	380	600	980	1390	2015	2505	2700
14	350	90	220	515	810	1330	1880	2730	3395	3700
16	400	125	305	705	1110	1820	2575	3735	4645	5100
18	450	135	325	765	1200	1965	2780	4035	5015	5500
20	500	195	470	1095	1715	2810	3980	5775	7180	7800
24	600	300	750	1750	2750	4500	6400	9250	11500	12500

Dimensional Data: HP Series High Performance Double Offset BFV, ANSI 150


WAFER STYLE

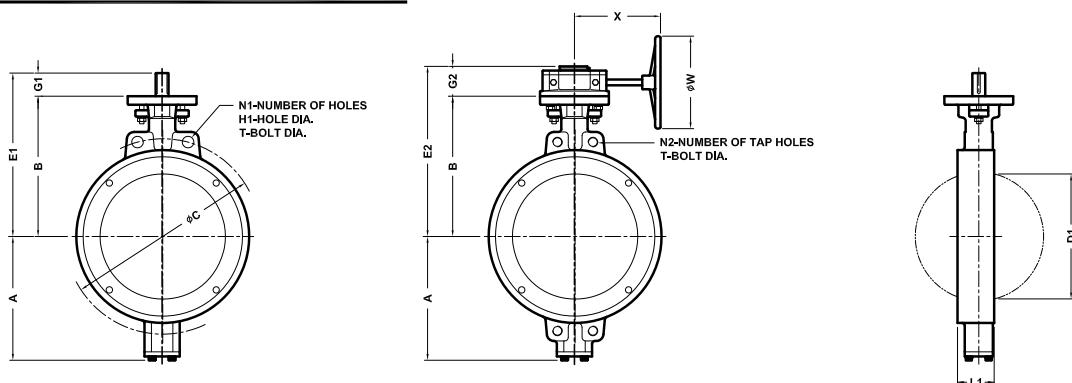


LUGGED STYLE

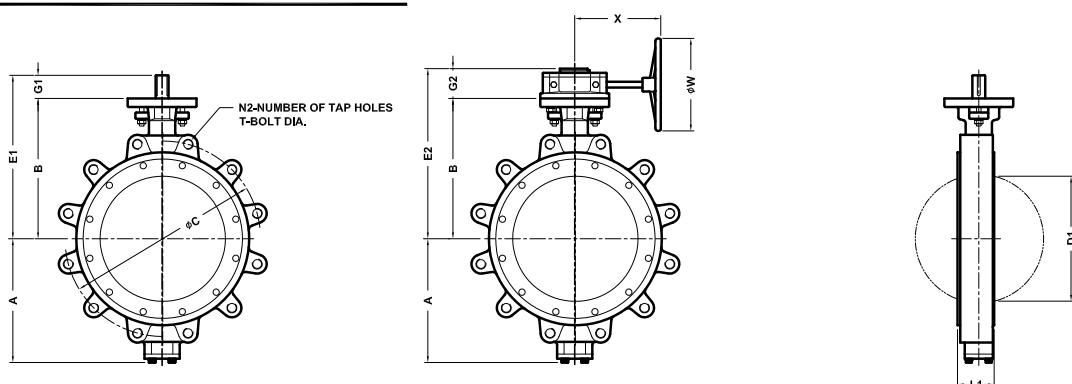


FLANGED STYLE

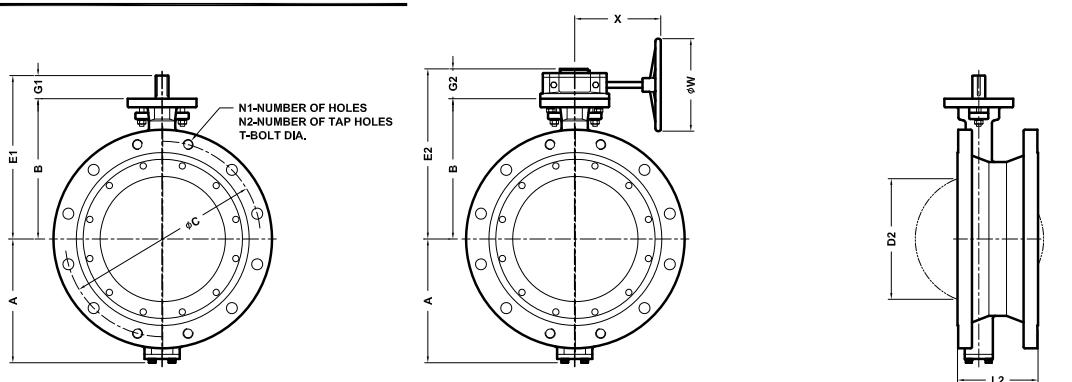

TOP WORKS

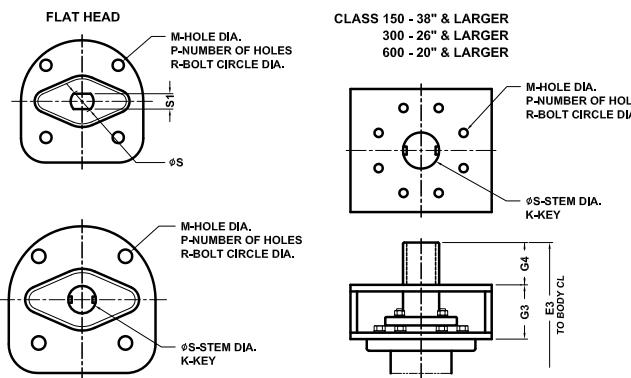

HAND LEVER

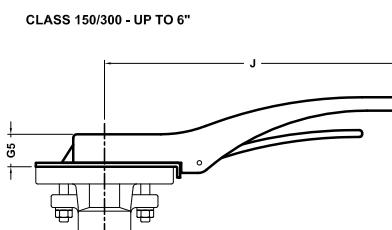

VALVE SIZE	G5	J
2"-3" Class 150/300	1.29	8.86
4"-6" Class 150/300	1.29	12.78

HP Series Weights


Size	Class 150	Class 300	Class 600	Size	Class 150	Class 300	Class 600
2"	9	9		18"	359	605	1,415
2.5"	15	15		20"	447	662	1,617
3"	22	22	53	24"	763	1,005	2,110
4"	24	24	68	26"	840	1,322	
5"	29	40	114	28"	895	1,516	
6"	33	48	163	30"	1,014	1,712	
8"	55	81	260	32"	1,129	1,881	
10"	99	178	438	36"	1,560	2,262	
12"	143	196	667	40"	2,125	2,750	
14"	178	328	920	42"	2,363		
16"	323	464	1,122	48"	2,537		

Dimensions: Class 150


SIZE (inch)	A	B	G1	G2	G3	G4	E1	E2	E3	X	W	D1	D2	L1	L2	C	T	Flanged Drilling				Top Works							
																		Wafer		Lug	Flange	R	P	M	S1	S	Key		
																		N1	N2	H1	N2	N1	N2						
2	4.18	4.92	1.26	2.36	-	-	6.18	7.28	-	7.00	6.00	1.52	0.98	1.73	-	4.75	5/8"x11UNC	2	-	3/4	4	-	-	3.25	4	0.43	0.374	0.551	-
2.5	4.26	5.87	1.26	2.36	-	-	7.13	8.23	-	7.00	6.00	2.18	1.63	1.89	-	5.50	5/8"x11UNC	2	-	3/4	4	-	-	3.25	4	0.43	0.437	0.624	-
3	4.65	6.30	1.26	2.36	-	-	7.56	8.66	-	7.00	6.00	2.71	2.14	1.93	-	6.00	5/8"x11UNC	2	-	3/4	4	-	-	3.25	4	0.43	0.437	0.624	-
4	5.12	7.01	1.26	2.36	-	-	8.27	9.37	-	7.00	6.00	3.54	3.03	2.13	5.00	7.50	5/8"x11UNC	2	-	3/4	8	4	4	3.25	4	0.43	0.500	0.748	-
5	5.79	7.60	1.26	2.36	-	-	8.86	9.96	-	7.00	6.00	4.50	4.05	2.24	5.51	8.50	3/4"x10UNC	2	-	7/8	8	4	4	3.25	4	0.43	0.500	0.748	-
6	6.81	8.39	1.26	2.36	-	-	9.65	10.75	-	7.00	6.00	5.39	4.98	2.24	5.51	9.50	3/4"x10UNC	2	-	7/8	8	4	4	3.25	4	0.43	0.500	0.748	-
8	7.99	9.45	1.26	2.73	-	-	10.71	12.18	-	10.07	12.00	7.24	6.93	2.56	5.98	11.75	3/4"x10UNC	2	-	7/8	8	4	4	5.00	4	0.55	0.626	0.874	-
10	8.97	11.02	2.05	2.73	-	-	13.07	13.75	-	10.07	12.00	9.13	8.81	2.83	6.50	14.25	7/8"x9UNC	2	-	1	12	8	4	5.00	4	0.55	-	1.124	0.25x0.25
12	10.74	12.20	2.01	2.73	-	-	14.21	14.93	-	10.07	12.00	10.90	10.50	3.19	7.01	17.00	7/8"x9UNC	2	-	1	12	8	4	5.00	4	0.55	-	1.124	0.25x0.25
14	12.12	13.19	2.24	3.44	-	-	15.43	16.63	-	12.00	12.00	12.31	11.95	3.62	7.48	18.75	1"x8UNC	2	-	1-1/8	12	8	4	5.00	4	0.55	-	1.374	0.31x0.31
16	13.70	15.47	2.99	3.44	-	-	18.46	18.91	-	12.00	12.00	14.08	13.78	4.02	8.50	21.25	1"x8UNC	2	-	1-1/8	16	12	4	6.50	4	0.83	-	1.874	0.50x0.50
18	15.07	16.54	2.99	4.03	-	-	19.53	20.57	-	12.09	16.00	16.22	15.86	4.49	8.74	22.75	1 1/8"x8UN	-	4	-	16	12	4	6.50	4	0.83	-	1.874	0.50x0.50
20	16.26	17.72	2.99	4.03	-	-	20.71	21.75	-	12.09	16.00	17.84	17.51	5.00	9.02	25.00	1 1/8"x8UN	-	4	-	20	16	4	6.50	4	0.83	-	2.124	0.50x0.50
22	17.71	19.29	4.02	5.12	-	-	23.31	24.41	-	16.93	23.62	19.53	19.28	6.06	10.51	27.25	1 1/4"x8UN	-	4	-	20	16	4	10.00	8	0.75	-	2.555	0.75x0.50
24	19.09	20.87	4.02	5.12	-	-	24.89	25.99	-	16.93	23.62	21.24	21.02	6.06	10.51	29.50	1 1/4"x8UN	-	4	-	20	16	4	10.00	8	0.75	-	2.555	0.75x0.50
26	20.27	22.24	4.02	5.12	-	-	26.26	27.36	-	16.93	23.62	22.71	22.36	6.50	11.50	31.75	1 1/4"x8UN	-	4	-	24	20	4	10.00	8	0.75	-	2.555	0.75x0.50
28	21.65	23.62	4.02	5.12	-	-	27.64	28.74	-	16.93	23.62	24.76	24.49	6.50	11.50	34.00	1 1/4"x8UN	-	4	-	28	24	4	10.00	8	0.75	-	2.555	0.75x0.50
30	23.42	25.39	4.45	6.81	-	-	29.84	32.20	-	18.82	27.56	26.45	26.18	7.48	12.52	36.00	1 1/4"x8UN	-	4	-	28	24	4	10.00	8	0.75	-	3.146	0.87x0.55
32	24.60	26.38	4.45	6.81	-	-	30.83	33.19	-	18.82	27.56	28.42	28.19	7.48	12.52	38.50	1 1/2"x8UN	-	4	-	28	24	4	10.00	8	0.75	-	3.146	0.87x0.55
34	26.57	27.56	4.45	6.81	-	-	32.01	34.37	-	18.82	27.56	30.16	29.96	7.99	12.99	40.50	1 1/2"x8UN	-	4	-	32	28	4	10.00	8	0.75	-	3.146	0.87x0.55
36	26.77	28.74	4.45	6.81	-	-	33.19	35.55	-	18.82	27.56	32.16	31.93	7.99	12.99	42.75	1 1/2"x8UN	-	4	-	32	28	4	10.00	8	0.75	-	3.146	0.87x0.55
38	27.56	27.56	-	6.69	5.91	4.72	-	40.16	38.19	22.83	27.56	33.93	33.66	8.50	16.14	45.25	1 1/2"x8UN	-	4	-	32	28	4	11.73	8	0.91	-	3.933	1.10x0.63
40	29.84	30.12	-	6.69	5.91	4.72	-	42.72	40.75	22.83	27.56	36.33	35.98	8.50	16.14	47.25	1 1/2"x8UN	-	4	-	36	32	4	11.73	8	0.91	-	3.933	1.10x0.63
42	31.10	30.71	-	6.69	6.30	4.72	-	43.70	41.73	22.83	27.56	37.91	37.76	9.49	16.93	49.50	1 1/2"x8UN	-	4	-	36	28	8	11.73	8	0.91	-	3.933	1.10x0.63
48	35.43	34.65	-	6.69	6.30	5.31	-	47.64	46.26	22.83	27.56	43.93	43.46	10.00	18.50	56.00	1 1/2"x8UN	-	8	-	44	36	8	11.73	8	0.91	-	4.720	1.26x0.71

Dimensional Data: HP Series High Performance Double Offset BFV, ANSI 300 & ANSI 600


WAFER STYLE

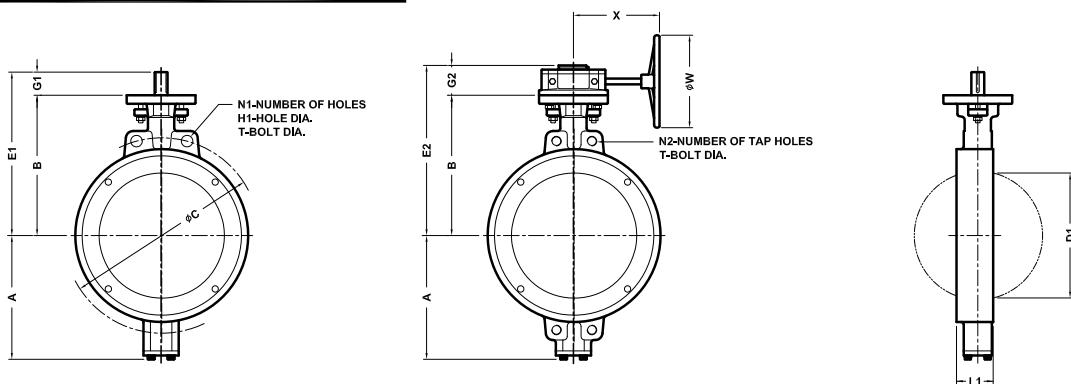


LUGGED STYLE

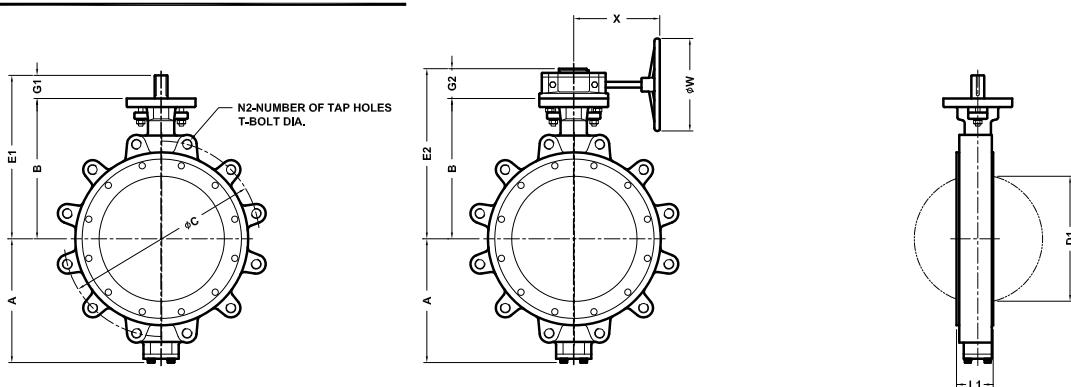


FLANGED STYLE

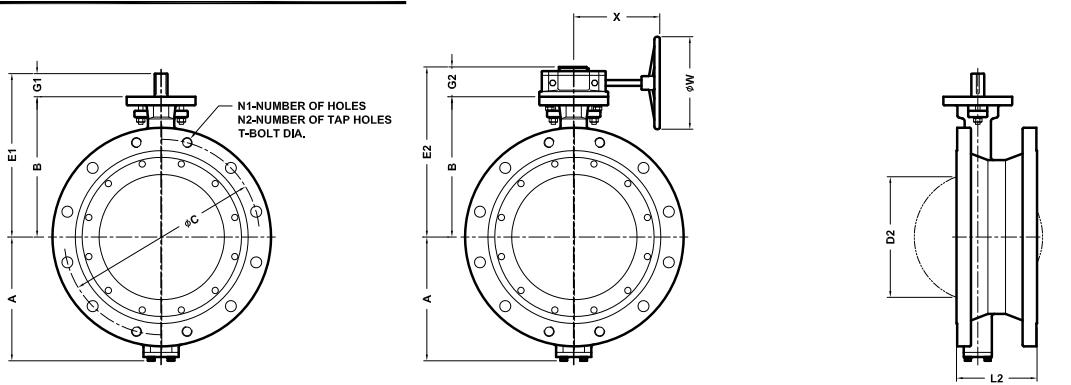

TOP WORKS

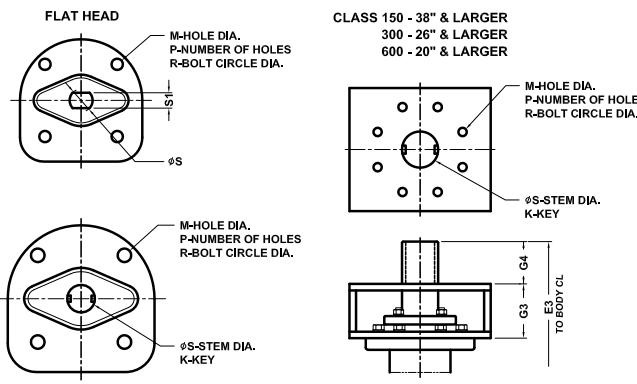

HAND LEVER

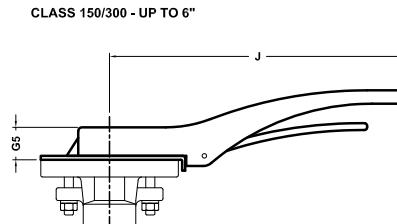

VALVE SIZE	G5	J
2"-3" Class 150/300	1.29	8.86
4"-6" Class 150/300	1.29	12.78

Dimensions: Class 300













SIZE (inch)	A	B	G1	G2	G3	G4	E1	E2	E3	X	W	D1	D2	L1	L2	C	T	Flanged Drilling					Top Works						
																		Wafer			Lug	Flange	R	P	M	S1	S	Key	
																		N1	N2	H1	N2	N1							
2	4.18	4.92	1.26	2.36	-	-	6.18	7.28	-	7.00	6.00	1.52	0.98	1.73	-	5.00	5/8"x11UNC	2	-	3/4	8	-	-	3.25	4	0.43	0.374	0.551	-
2.5	4.26	5.87	1.26	2.36	-	-	7.13	8.23	-	7.00	6.00	2.18	1.63	1.89	-	5.88	3/4"x10UNC	2	-	7/8	8	-	-	3.25	4	0.43	0.437	0.624	-
3	4.65	6.30	1.26	2.36	-	-	7.56	8.66	-	7.00	6.00	2.71	2.14	1.93	-	6.62	3/4"x10UNC	2	-	7/8	8	-	-	3.25	4	0.43	0.437	0.624	-
4*	5.12	7.01	1.26	2.36	-	-	8.27	9.37	-	7.00	6.00	3.54	3.03	2.13	5.00	7.88	3/4"x10UNC	2	-	7/8	8	4	4	3.25	4	0.43	0.500	0.748	-
5	5.79	7.60	1.26	2.36	-	-	8.86	9.96	-	7.00	6.00	4.50	4.05	2.24	5.51	9.25	3/4"x10UNC	2	-	7/8	8	4	4	3.25	4	0.43	0.500	0.748	-
6	7.17	8.66	1.26	2.36	-	-	9.92	11.02	-	7.00	6.00	5.32	4.96	2.32	5.51	10.62	3/4"x10UNC	2	-	7/8	12	8	4	3.25	4	0.43	0.500	0.748	-
8	8.77	10.24	2.01	2.73	-	-	12.25	12.97	-	10.07	12.00	7.25	6.81	2.87	5.98	13.00	7/8"x9UNC	2	-	1	12	8	4	5.00	4	0.55	-	1.124	0.25x0.25
10	9.84	11.42	2.01	2.73	-	-	13.43	14.15	-	10.07	12.00	8.90	8.58	3.27	6.50	15.25	1" x8UNC	-	4	-	16	12	4	5.00	4	0.55	-	1.124	0.25x0.25
12	11.06	12.80	2.09	3.44	-	-	14.89	16.24	-	12.00	12.00	10.57	10.28	3.62	7.01	17.75	1 1/8"x8UN	-	4	-	16	12	4	5.00	4	0.55	-	1.374	0.31x0.31
14	13.11	14.76	2.99	4.02	-	-	17.75	18.78	-	12.09	16.00	11.93	11.66	4.61	7.48	20.25	1 1/8"x8UN	-	4	-	20	16	4	6.50	4	0.83	-	1.874	0.50x0.50
16	14.88	16.73	2.99	4.02	-	-	19.72	20.75	-	12.09	16.00	13.58	13.19	5.24	8.50	22.50	1 1/4"x8UN	-	4	-	20	16	4	6.50	4	0.83	-	2.122	0.50x0.50
18	16.53	18.31	4.02	5.12	-	-	22.33	23.43	-	16.93	23.62	15.71	15.39	5.87	8.74	24.75	1 1/4"x8UN	-	4	-	24	20	4	10.00	8	0.75	-	2.555	0.75x0.50
20	18.11	19.88	4.02	5.12	-	-	23.90	25.00	-	16.93	23.62	17.88	17.52	6.26	9.02	27.00	1 1/4"x8UN	-	4	-	24	20	4	10.00	8	0.75	-	2.555	0.75x0.50
24	20.94	22.83	4.45	6.81	-	-	27.28	29.64	-	18.82	27.56	20.95	20.55	7.13	10.51	32.00	1 1/2"x8UN	-	4	-	24	20	4	10.00	8	0.75	-	3.146	0.87x0.55
26	22.05	22.64	-	6.81	5.91	4.45	-	35.36	33.00	18.82	27.56	22.05	21.69	8.27	11.50	34.50	1 5/8"x8UN	-	4	-	28	24	4	10.00	8	0.71	-	3.146	0.87x0.55
28	24.02	24.02	-	6.69	6.30	4.72	-	37.01	35.04	22.83	27.56	23.82	23.42	9.02	11.50	37.00	1 5/8"x8UN	-	4	-	28	24	4	11.73	8	0.91	-	3.933	1.10x0.63
30	25.98	25.59	-	6.69	6.30	4.72	-	38.58	36.61	22.83	27.56	26.47	25.87	9.06	12.52	39.25	1 3/4"x8UN	-	4	-	28	24	4	11.73	8	0.91	-	3.933	1.10x0.63
32	26.38	26.38	-	6.69	6.30	4.72	-	39.37	37.40	22.83	27.56	28.66	28.26	9.49	12.52	41.50	1 7/8"x8UN	-	8	-	28	20	8	11.73	8	0.91	-	3.933	1.10x0.63
36	29.72	29.92	-	6.69	6.30	5.31	-	42.91	41.53	22.83	27.56	32.60	32.05	10.75	12.99	46.00	2"x8UN	-	8	-	32	24	8	11.73	8	0.91	-	4.720	1.26x0.71
40	29.84	30.71	-	8.15	6.69	5.91	-	45.55	43.31	23.82	31.50	35.47	35.35	11.81	16.14	45.50	1 5/8"x8UN	-	8	-	32	24	8	14.02	8	1.30	-	5.508	1.42x0.79
42	31.10	31.89	-	8.15	6.69	5.91	-	46.73	44.49	23.82	31.50	36.53	36.35	11.81	16.14	47.50	1 5/8"x8UN	-	8	-	32	24	8	14.02	8	1.30	-	5.508	1.42x0.79
48	34.84	36.61	-	9.29	7.87	6.89	-	53.77	51.37	24.96	35.43	41.93	41.38	13.78	18.50	54.00	1 7/8"x8UN	-	8	-	32	24	8	15.98	8	1.54	-	6.920	1.77x0.98

*Flanged Type - A: 5.99 B: 7.48 E1: 8.74 E2: 10.51

Dimensions: Class 600

SIZE (inch)	A	B	G1	G2	G3	G4	E1	E2	E3	X	W	D1	D2	L1	L2	C	T	Flanged Drilling					Top Works						
																		Wafer			Lug	Flange	R	P	M	S1	S	Key	
																		N1	N2	H1	N2	N1							
3	5.16	6.57	1.18	2.36	-	-	7.75	8.93	-	7.00	6.00	2.67	2.51	2.17	-	6.62	3/4"x10UNC	2	-	7/8	8	-	-	3.25	4	0.43	0.500	0.748	-
4	5.95	7.68	1.26	2.73	-	-	8.94	10.41	-	10.07	12.00	3.61	2.94	2.52	7.48	8.50	7/8"x9UNC	2	-	1	8	4	4	5.00	4	0.55	0.624	0.874	-
6	8.38	9.45	2.24	3.44	-	-	11.69	12.89	-	12.00	12.00	5.00	4.22	3.07	8.27	11.50	1"x8UNC	-	4	-	12	8	4	5.00	4	0.55	-	1.374	0.31x0.31
8	9.76	11.42	2.99	4.02	-	-	14.41	15.44	-	12.09	16.00	6.35	5.71	4.06	9.06	13.75	1 1/8"x8UN	-	4	-	12	8	4	6.50	4	0.83	-	1.874	0.50x0.50
10	11.33	13.19	2.99	4.02	-	-	16.18	17.21	-	12.09	16.002	8.11	7.84	4.61	9.84	17.00	1 1/4"x8UN	-	4	-	16	12	4	6.50	4	0.83	-	1.874	0.50x0.50
12	13.11	15.16	4.02	5.12	-	-	19.18	20.28	-	16.93	23.62	9.69	9.41	5.51	10.63	19.25	1 1/4"x8UN	-	4	-	20	16	4	10.00	8	0.75	-	2.358	0.75x0.50
14	14.96	17.13	4.02	5.12	-	-	21.15	22.25	-	16.93	23.62	10.94	10.43	6.10	11.42	20.75	1 3/8"x8UN	-	4	-	20	16	4	10.00	8	0.75	-	2.555	0.75x0.50
16	16.33	18.70	4.02	5.12	-	-	22.72	23.82	-	16.93	23.62	12.68	12.28	7.01	12.20	23.75	1 1/2"x8UN	-	4	-	20	16	4	10.00	8	0.75	-	2.555	0.75x0.50
18	18.11	19.69	4.45	6.81	-	-	24.14	26.50	-	18.82	27.56	14.46	14.45	7.87	12.99	25.75	1 5/8"x8UN	-	4	-	20	16	4	10.00	8	0.75	-	3.146	0.87x0.55
20	19.29	19.69	-	6.69	5.91	4.72	-	32.29	30.32	22.83	27.56	15.75	15.31	8.50	13.78	28.50	1 5/8"x8UN	-	4	-	24	20	4	11.73	8	0.91	-	3.933	1.10x0.63
24	23.03	22.83	-	6.69	6.30	4.72	-	35.82	33.85	22.83	27.56	19.92	19.3																

PRATT PRODUCT GUIDE

 Model 2FII	 Monoflange MKII	 Plug Valve
 Triton® XR70	 Indicating Butterfly Valve UL & FM approved	 Tilting Disc Check Valve
 Triton® XL	 N-Stamp Nuclear Butterfly Valve	 Cone Valve
 Rectangular	 PIVA Post Indicating Valve Assembly UL & FM approved	 Sleeve Valve
 Rubber Seated Ball Valve	 Triton® HP250	 Check Valve
 Metal Seated Ball Valve	 Control Systems	 Plunger Valve
 PRATT	 Air Valve	Henry Pratt Company 401 South Highland Avenue Aurora, Illinois 60506-5563 - US P: 630-844-4000 F: 630-844-4160 www.henrypratt.com ISO 9001: 2000 Certified