


Series GSF

Full Round, Flange Connection, Enclosed Construction, Direct Air Operated

- Clog resistant full round opening
- Low pressure drop
- No packing
- Drop tight closure
- Simple operation, rubber sleeve is the only moving part.

Applications: Ideal for controlling abrasive, viscous and corrosive fluids including wastewater, mine slurries, chemicals, cement, pulp stock, powder and pellets.

Operation: The GSF consists of a rubber sleeve inside a full round cast iron bonnet assembly. Injecting compressed air into the bonnet assembly causes the rubber sleeve to collapse, blocking flow through the valve. When the pressure is released, the resiliency of the rubber sleeve reopens the valve.

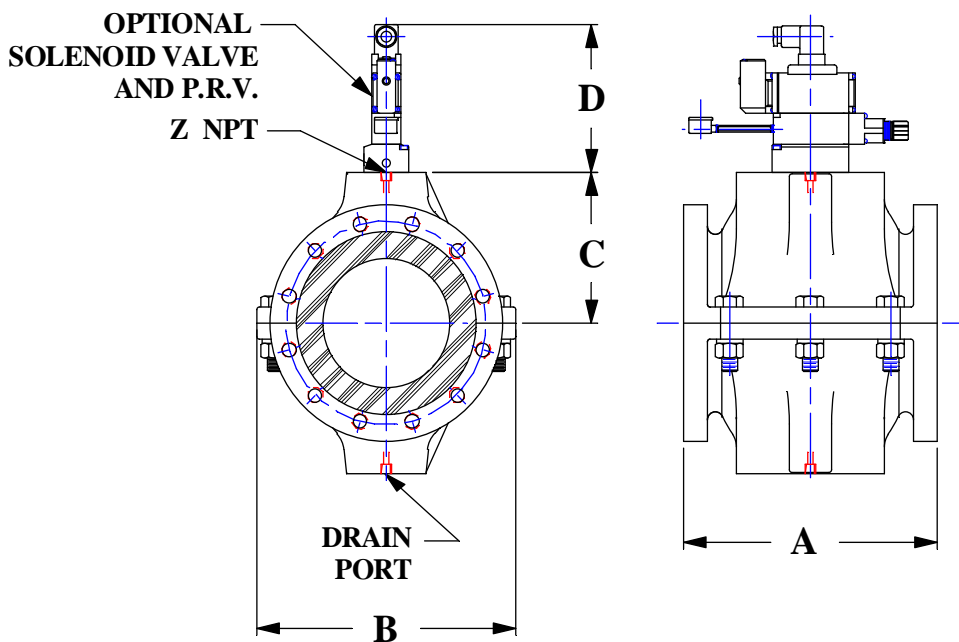

Specifications:

- Flanges: ANSI STD B-16, 125 lbs
- Housing: Cast Iron ASTM A48, Class 35

Options:

- Epoxy paint
- Sleeve elastomer
- Bolt-on pact solenoid valve is a 4-way, 5-port solenoid with weatherproof coil and manual override.
- PRV (with solenoid valve)
- I/P transducer for modulating service

All dimensions are in inches.

SIZE	1	1.25	1.5	2	2.5	3	4	5	6	8	10	12	14
A	4.00	4.31	4.75	5.25	5.75	6.00	8.00	10.00	12.00	16.00	20.00	24.00	28.00
B	4.62	4.87	5.37	6.37	7.00	7.50	9.25	10.62	12.25	14.50	16.87	20.00	22.50
C	2.12	2.37	2.50	3.06	3.56	3.81	4.62	5.62	7.00	8.37	10.25	11.75	13.00
D	4.62			6.82						8.00			
Z	1/4 NPT						1/2 NPT			3/4 NPT			
WT	12	13	15	23	32	36	64	85	120	205	300	540	620
AIR *	0.02	0.03	0.05	0.08	0.13	0.14	0.37	0.66	1.10	2.50	4.60	10.00	17.00
P	90 psi			75 psi			65 psi			55 psi		50 psi	

* Unit of Measure = ft³/cycle

* Air consumption per cycle at STP using 90 psi air.

Series GSD


Full Round, Flange Connection, Enclosed Construction, Direct Air Operated

The GSD is the same valve as the GSF except it has a double thick rubber sleeve.

- Clog resistant full round opening
- Low pressure drop
- No packing
- Drop tight closure
- Simple operation, rubber sleeve is the only moving part.

Applications: Ideal for abrasive, viscous and corrosive fluids including wastewater, mine slurries, chemicals, cement, pulp stock, powder and pellets.

Operation: The GSF consists of a rubber sleeve inside a full round cast iron bonnet assembly. Injecting compressed air into the bonnet assembly causes the rubber sleeve to collapse, blocking flow through the valve. When the pressure is released, the resiliency of the rubber sleeve reopens the valve.

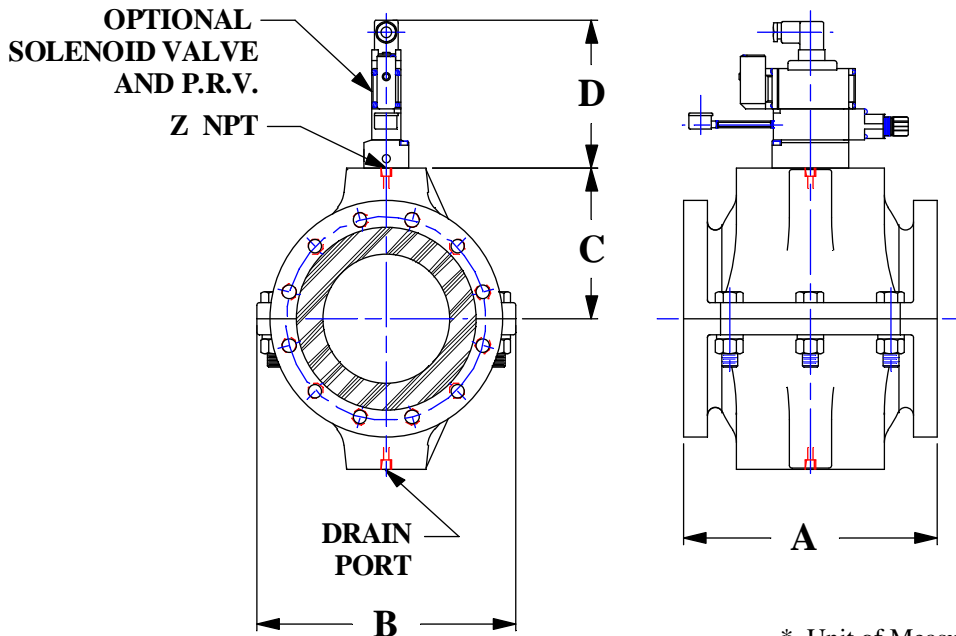

Specifications:

- Flanges: ANSI STD B-16, 125 lbs
- Housing: Cast Iron ASTM A48, Class 35

Options:

- Epoxy paint
- Sleeve elastomer
- Bolt-on pact solenoid valve is a 4-way, 5-port solenoid with weatherproof coil and manual override.
- PRV (with solenoid valve)
- I/P transducer for modulating service

* Unit of Measure = ft³/cycle

* Air consumption per cycle at STP using 90 psi air.

All dimensions are in inches.

SIZE	1	1-1/4	1-1/2	2	2-1/2	3	4	5	6	8	10	12
FLANGE	2		3			4	5	6	8	10	12	14
A	5.25		6.00			8.00	10.00	12.00	16.00	20.00	24.00	28.00
B	6.37		7.50			9.25	10.62	12.25	14.50	16.87	20.00	22.50
C	3.06		3.81			4.62	5.62	7.00	8.37	10.25	11.75	13.00
D	6.82						8.00					
Z	1/4 NPT			1/2 NPT			3/4 NPT			1 NPT		
WT	23		36			64	85	120	205	300	540	620
AIR *	0.08 Max		0.14			0.37	0.66	1.10	2.50	4.60	10.00	17.00
P	90 psi			75psi		65 psi		55 psi		50 psi		